

### E1012



安装方便精密,防腐耐高温,安全绝缘,使用高效。

### 总览

????

????????? ??????????????

????

E??????

10????? 1

12?????12

????? ??

E??????


# **UPUN T B** Our Pursuit You are brittent


JI CILIXIP	' Gouare	prietin						
型号	, i	尺.	寸 Dimensio	n (mm)		导线截面	Cable size	绝缘套颜色 Colo
Item No	F	L	w	DØ	cø	A. W. G	mm²	(1)德国用 German (2)法国用 Freench
E 0506	6	12						(1) ITE & O
E 0508	8	14	2.6	1.3	1.0	#22	0.5	(1) 橙色 Orange (2) 白色 White
E 0510	10	16		11			10 10 10 10 10 10 10 10 10 10 10 10 10 1	Z I B WIII.O
E 7506	6	12.4						
E 7508	8	14.6	2.0	4.0	1.2	#20	0.75	(1) 白色 White
E 7510	10	16.4	2.8	1.6	1.3	#20	0.75	(2) 蓝色 Blue
E 7512	12	18.4						
E 1006	6	12.4		3	1.5	#18	1.0	(1) 黄色 Yellow (2) 红色 Red
E 1008	8	14.6	2.0	4.0				
E 1010	10	16.4	3.0	1.8				
E 1012	12	18.4						
E 1508	8	14.6						
E 1510	10	16.4	3.5	2.1	1.8	#16	1.5	(1) 红色 Red (2) 黑色 Black
E 1518	18	24.4						
E 2508	8	15.2						ALLEY TO DESCRIPTION OF THE SECOND OF
E 2512	12	19.2	4.0	2.6	2.3	#14	2.5	(1) 蓝色 Blue
E 2518	18	25.2						(2) 灰色 Gray
E 4009	9	16.5						
E 4012	12	19.5	4.4	3.2	2.8	#12	4.0	(1) 灰色 Gray (2) 橙色 Orange
E 4018	18	25.5						(z) 恒巴 Orange
E 6012	12	20	6.3	0.0	2.5	0.000.00	6.0	(1) 黑色 Black
E 6018	18	26	6.3	3.9	3.5	#10	6.0	② 绿色 Green
E 10-12	12	21.5	7.6	4.0	4.5		40.0	(1) 乳白色 Milk
E 10-18	18	27.5	7.6	4.9	4.5	#7	10.0	② 褐(棕)色 Brown
E 16-12	12	22.2	0.0		F 0		40.0	(1) 绿色 Green
E 16-18	18	28.2	8.8	6.2	5.8	#5	16.0	(2) 乳白色 Milk
E 25-16	16	29	44.0		7.5	242	05.0	(1) 褐(棕)色 Brown
E 25-22	22	35	11.2	7.9	7.5	#4	25.0	(2) 乳白色 Milk
E 35-16	16	30	40.7			Jacobs Co.	05.0	4.5=-
E 35-25	25	39	12.7	8.7	8.3	#2	35.0	灰褐色 Gray
E 50-20	20	36	45.0	4.5.5	40.0		EC 0	124 154 /2 011
E 50-25	25	41	15.3	10.9	10.3	#1	50.0	橄榄色 Olive

### 关键商业数据

订货号	613098

### 技术参数



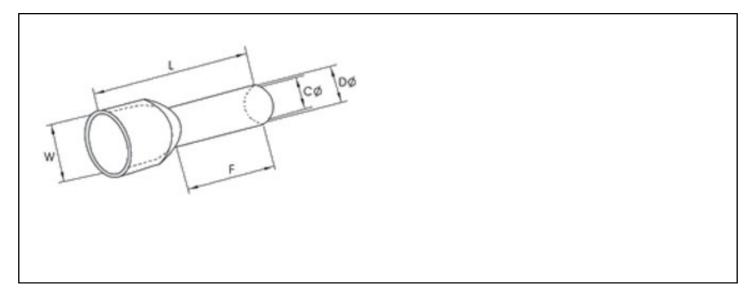

### 压线范围

导线截面(单位:mm)	1.0
-------------	-----

## 技术参数

F	12
L	18.4
W	3.0
D	1.8
С	1.5

### 环境条件

B 使若国	-14°C-105°C	
1000000	-140-1030	

### 认证详细

